


**ALL LAYOUTS CAN BE CUSTOMIZED**

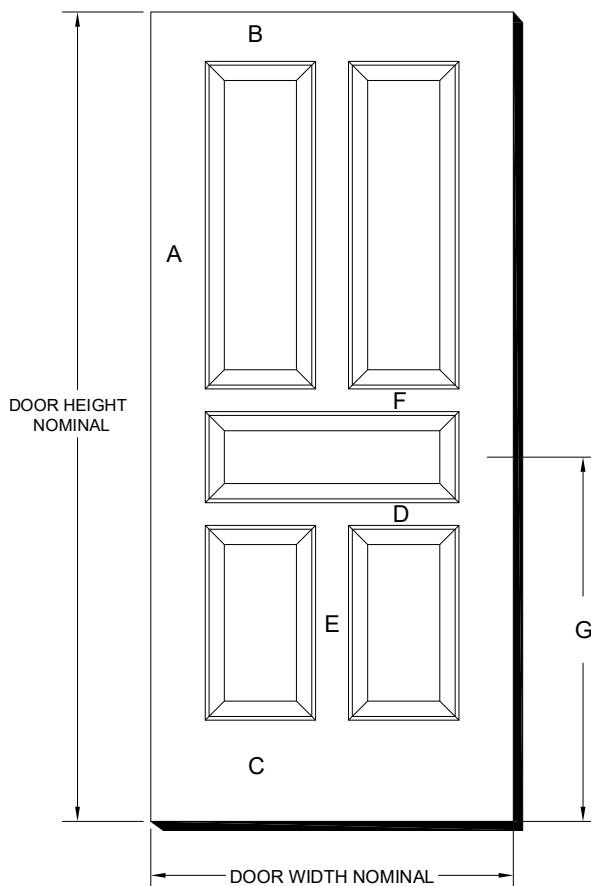

STYLE	A		B	C	D	E	F	G
	2/0-2/8	3/0 - 4/0 **						
*101, *201, *301, *401	4-9/16"	5-1/2"	4-7/8"	10"	N/A	N/A	N/A	N/A
*102, *202, *302, *402	4-9/16"	5-1/2"	4-7/8"	10"	3-1/4"	N/A	N/A	36"
*103, *203, *303, *403	4-9/16"	5-1/2"	4-7/8"	10"	2-1/4"	N/A	2-1/4"	36"
*104, *204, *304, *404	4-9/16"	5-1/2"	4-7/8"	10"	6-1/2"	3-1/4"	N/A	36"
*105, *205, *305, *405	4-9/16"	5-1/2"	4-7/8"	10"	2-1/4"	3-1/4"	2-1/4"	36"
*106, *206, *306, *406	4-9/16"	5-1/2"	4-7/8"	10"	6-1/2"	3-1/4"	3-1/4"	36"

\* Infinity series 1000, 2000A, 2000D, Encore series 6000, and Ovation series 7000

mill spec.

Example: 1105 Infinity, 6105 Encore, and 7105 Ovation

\*\* 45-90 minute fire rated door require 4-1/2" minimum stiles in intumescent core. On mineral core fire rated doors a 5-3/8" minimum stile is required.

**A** - Stile Width

**D** - Lock Rail

**G** - Lock rail / center line location (up from bottom)

**B** - Top Rail


**E** - Center Stile

**C** - Bottom Rail


**F** - Intermediate Rail

• For Bravo layouts specifications - see page 6


**ALL LAYOUTS CAN BE CUSTOMIZED  
MORE STANDARD LAYOUTS AVAILABLE  
CALL YOUR REPRESENTATIVE FOR SPECIFICS**

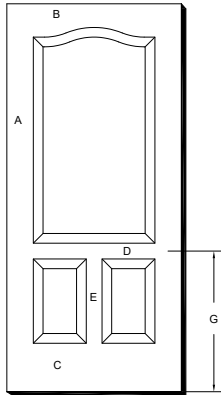


503

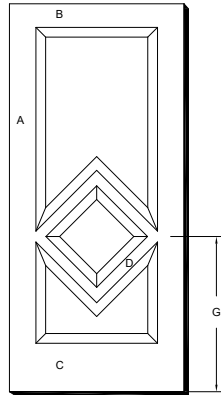


506

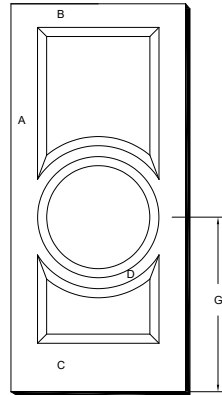


510

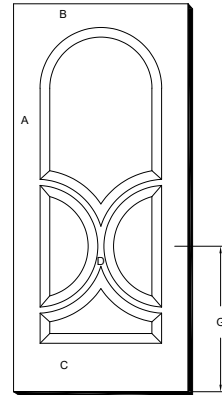


511

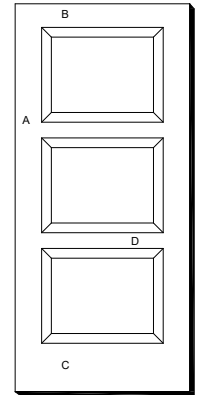


516

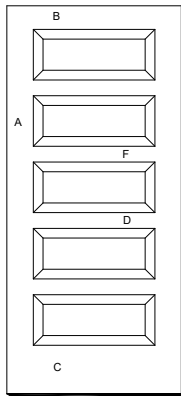


517

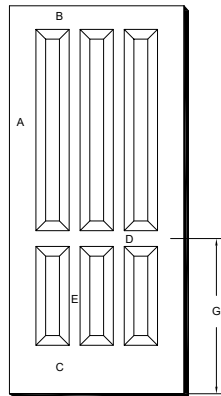


521

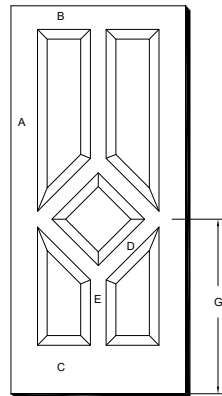

524

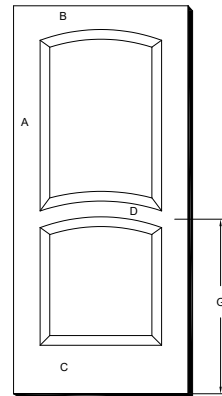

535

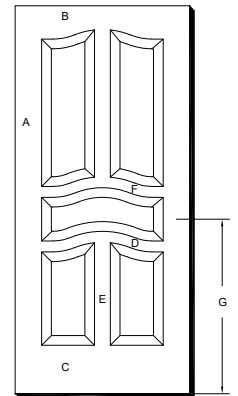

603

STYLE	A		B	C	D	E	F	G
	2/0-2/8	3/0 - 4/0 **						
*503	4-9/16"	5-1/2"	4-7/8"	10"	3-1/4"	3-1/4"	N/A	29"
*506	4-9/16"	5-1/2"	4-7/8"	10"	2-1/4"	N/A	N/A	32"
*510	4-9/16"	5-1/2"	4-7/8"	10"	2-1/4"	N/A	N/A	36"
*511	4-9/16"	5-1/2"	4-7/8"	10"	1-1/4"	N/A	N/A	30"
*516	4-9/16"	5-1/2"	4-7/8"	10"	3-1/4"	N/A	3-1/4"	N/A
*517	4-9/16"	5-1/2"	4-7/8"	10"	3-1/4"	N/A	3-1/4"	N/A
*521	4-9/16"	5-1/2"	4-7/8"	10"	3-1/4"	2-1/4"	N/A	32"
*524	4-9/16"	5-1/2"	4-7/8"	10"	3-1/4"	3-1/4"	N/A	36"
*535	4-9/16"	5-1/2"	4-7/8"	10"	3-1/4"	N/A	N/A	36"
*603	4-9/16"	5-1/2"	4-7/8"	10"	2-1/4"	3-1/4"	2-1/4"	36"

\* Infinity series 1000, Encore series 6000, and Ovation series 7000

mill spec. 2

\*\* 45-90 minute fire rated door require 4-1/2" minimum stiles in intumescent core. On mineral core fire rated doors a 5-3/8" minimum stile is required.

A - Stile Width

D - Lock Rail

G - Lock rail / center line location (up from bottom)

B - Top Rail

E - Center Stile

C - Bottom Rail

F - Intermediate Rail